



AKSHAYA AGRI

अन्नदाता सुखी भव् ॥

BUND PLASTER



Well engineered products



Compatible with all tractors.



High Quality performance




Low Maintenance

Bund Plaster

- Hydraulically operated plaster disc for depth adjustment
- High wear-resistant tiller blade by Taiyo Japan
- SS 202 material used for wings ensures less wear and tear
- Waterproof transmission gearbox and flange housing

MODELS AND SPECIFICATIONS –

Particulars	ABP 310
Height of Form Bunds (mm)	250 to 350
Width of Roller (mm)	310
Operating Speed	0.8 to 1.2 Km/Hr
Width of Tilling (mm)	140
Speed of Roller	252 RPM
Rotor Swing Diameter (mm)	700
Plaster Disc Diameter (mm)	780
Tractor Specification	Above 40 HP
PTO Speed	540 RPM/540 E
Dimension L x W x H (mm)	2350 x 1150 x 1200
Weight	590 Kgs

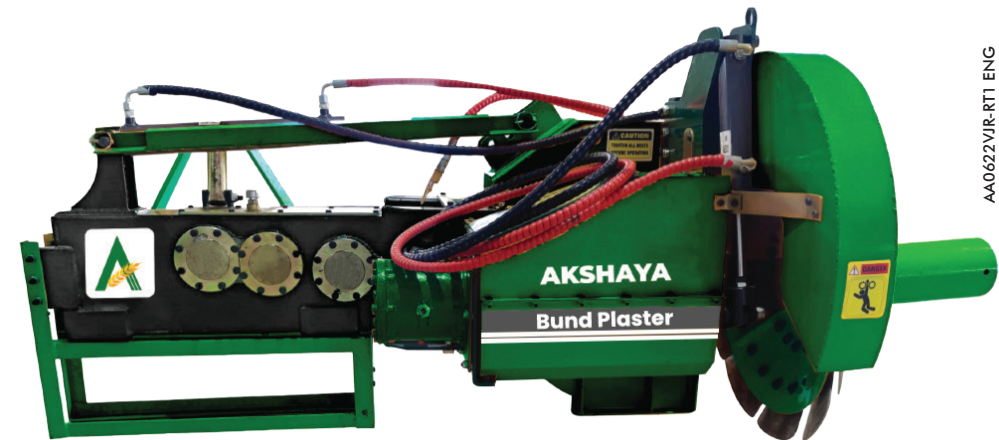

Akshaya Agri Equipment & Services Private Limited

E78, Toopran IP, Muppireddypally (V),
Manoharabad(M), Medak(D),
Telangana(IN) 502334 connect@akshaya-agri.com

Please Note: Improvement in the product is a continuous process. Hence the information given in this brochure is subject to change without prior notice.



Scan to visit website



Scan to visit website

